

Long-shafted slurry pump

Landia slurry pump type TPG for PTO and MPG for electric operation with 4", 5" or 6" pump pipe from 5.5 - 30.0 kW.

A highly effective, reliable and sturdy pump, especially suited for pumping of slurry and other liquids with a high dry matter content.



Chopping knives of tempered steel and auger conveyor assure that solids are shredded and thus eliminate pump inlet plugging.

- Long durability, often 10-15 years of operation without repair
- Pump housing and impeller in cast iron, designed for maximum efficiency
- Pipe and fittings of hot dip galvanized steel
- Constructed for easy service
- Height-adjustable telescopic drainage pipe
- Can be supplied for reception and storage tanks up to 7.5 m tank depth
- Tractor operation with right angle gear for optimum efficiency



Pump housing with extended knife system.



Right angle gear for PTO operation
Optimum efficiency:
540 rpm. for 4"/5" pumps
and 1000 rpm. for 6" pumps
Extra equipment can be supplied for installation in storage tank.

Landia slurry pump type TPG and MPG

Pipe dimension: 4" (ø114), 5" (ø140) or 6" (ø168).

Performance and specifications:




Article no.	Rated effect kW	Consumption at 3x400 V amp	Weight approx. kg	Pump type	Performance at 4 m head			Pres. against closed valve head m
					Thin ca. l/min.	Medium ca. l/min.	Very thick ca. l/min.	
2109402	20*	--	300	TPG4	5600	4750	2800	21,5
2004422	5,5	10,5	300	MPG5,5/4	2300	1950	1150	9,5
2004423	7,5	15,0	300	MPG7,5/4	3200	2700	1600	10,5
2004424	11,0	21,5	300	MPG11/4	4100	3500	2050	14,5
2004425	15,0	28,5	300	MPG15/4	4800	4100	2400	17,0
2109502	26*	--	350	TPG5	5850	5250	3500	21,5
2004523	11,0	21,5	350	MPG11/5	4200	3750	2500	14,5
2004524	15,0	28,5	350	MPG15/5	4850	4350	2900	17,0
2004525	18,5	35,0	350	MPG18,5/5	5500	4950	3300	19,5
2109603	37**	--	400	TPG6	7650	7250	5350	23,0
2004621	15,0	28,5	400	MPG15/6	5100	4850	3550	17,0
2004623	18,5	35,0	400	MPG18,5/6	5750	5450	4000	19,0
2004624	22,0	42,0	400	MPG22/6	6350	6000	4450	20,0
2004625	30,0	55,5	400	MPG30/6	7000	6650	4900	21,0

*Power requirement for 4"/5" TPG-pumps at 540 rpm on the power take off.

**Power requirement for 6" TPG-pumps at 1000 rpm on the power take off.

Pump diagrams:

The diagrams are applicable for water (0% dry matter content)

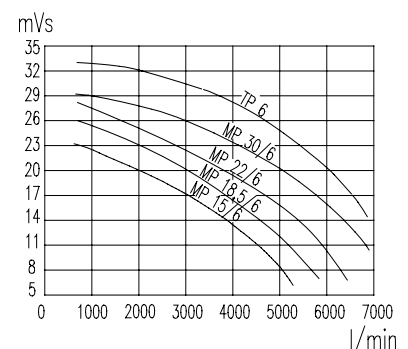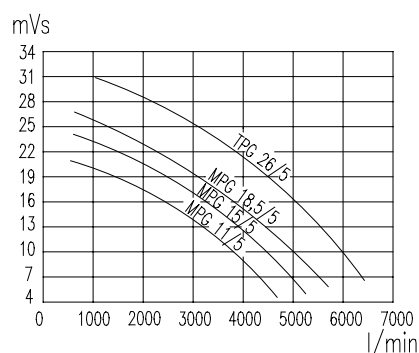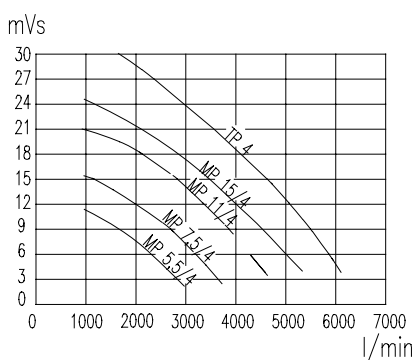

Standard slurry pumps are supplied with right angle gears or electric motors, as well as auger and knife system. Drainage pipe, bottom flushing equipment, two-way tap and PTO shaft are available as extra equipment. Ask for our brochure covering accessories, special equipment and installations.

The text and the technical data given must not be reproduced partly or completely without permission from Landia A/S. We reserve the right to make technical alterations. 2102GB-161106

Head office:
Landia A/S
 Industrivej 2
 DK- 6940 Lem
 Tel. +45 97341244
 Fax: +45 97341698
 e-mail: info@landia.dk
 www.landia.dk

UK-Branch:
Landia (UK) Ltd.
 Waymills Industrial Estate
 Whitchurch, Shropshire SY13 1TT
 Tel.: 01948 661 200
 Fax: 01948 661 201
 Email: info@landia.co.uk
 www.landia.co.uk